SCHEDULE

FINISHES SCHEDULE

		CILLS	SKIRT.	WALLS
		Tile cill to match wall tiles	100mm Cut tile as per floor	600 x 1200mm polished porcelain tile ,installed as per manufactures specification. Sample to be provided for approval by architect prior to installation allow R650/sqm excl. cost of labour. Wall colour: Dove grey. Tiles to be installed with porcelain adhesive. Grout colour: Dove grey.
G10	MALE TOILET	O	O	O
G11	PARAPLEGIC TOILET	O	O	O
G12	FEMALE TOILET	O	O	O

SANITARY SCHEDULE

		WHB	W/C	URINAL	TAPS		MISCELLANEOUS		
		705/700WH Basin Semi Recessed 540X450 by Vitalr or equivalent & approved. 302-32/N Waste complete with Chrome plated 44 mm bottle trap by Cobra or equivalent & approved. 232-10/NV Angle Valve, with durable ABS handle, DZR body, flow regulating spindle type headpart GJ BSP connections. To be installed as per manufacturers instruction with all necessary fixtures and fittings.	7/93/300WH Basin Basin Wall Hung 455x430x190mm by Cobra or equivalent & approved. 302-32/N Waste complete with Chrome plated 44 mm bottle trap by Cobra or equivalent & approved. 232-10/NV Angle Valve, with durable ABS handle, DZR body, flow regulating spindle type headpart GJ BSP connections. To be installed as per manufacturers instruction with all necessary fixtures and fittings.	Supply and Install Mereo or equivalent & Approved Waterless Waste Valve complying with: ATS 5200:047-2005. Acceptable forms of product certification are a WaterMark Certificate of Conformity (a registered certification trademark of Standards Australia Limited) or a SBI Kitemark Licence. Evidence of compliance must be provided to the contract administrator. The product must be sourced from an approved manufacturer, and a sample must be submitted for approval before procurement. Verify all on-site dimensions and confirm compatibility with the existing urinal and cubicle partitions. Install the waterless waste valve in accordance with manufacturer's instructions and conduct a water test upon completion to ensure a leak-proof seal. The final installation should be clean and professional, with no visible sealant or damage to surrounding finishes. Provide sample for approval prior to installation.	G-30265000 Self-closing pillar tap 2 by Grohe or equivalent & approved. To be installed as per manufacturers instruction with all necessary fixtures and fittings.	505-21B/HP Pillartap heavy pattern blue 15mm CP tap by Cobra or equivalent & approved. To be installed as per manufacturers instruction with all necessary fixtures and fittings.	6 mm Sloped float glass copper backed mirrors with polished pol sealed bevelled edges. Mirror size 510 x 1076 mm high above basin mounted flush tiles per architect details; mirror to be fixed with dome capped mirror screws.	GRABRAIL DGR-SS-150 Stainless Steel 800x206mm Cistern Back Rail	GRABRAIL DGR-SS-152 Stainless Steel 300x300x300mm Side Grab Rail
G10	MALE TOILET	O		O	O		O		
G11	PARAPLEGIC TOILET		O			O	O	O	O
G12	FEMALE TOILET	O			O		O		

CLOTHES LOCKER DETAILS

QUANTITY 14

TOP,SIDE,BACK & BOTTOM PANELS :
1mm THICK MILD STEEL SHEET

SHELVES :
1mm MILD STEEL SHEET & SUPPORTED WITH 15x15mm MILD STEEL ANGLE WELDED TO SIDE PANELS

NOTE : CONTRACTOR TO PROVIDE SHOP DRAWINGS AND A SAMPLE OF THE PRODUCT FOR APPROVAL BY THE ARCHITECT / CLIENT, PRIOR TO FABRICATION.

LEGS :
20x20x1.6mm MILD STEEL SQUARE HOLLOW SECTION

GENERAL :
ALL STEEL TO BE PRE-DRILLED, ELECTRO-GALV. AND EPOXY POWDER COATED REF : 5403, COLOUR BOLD RED

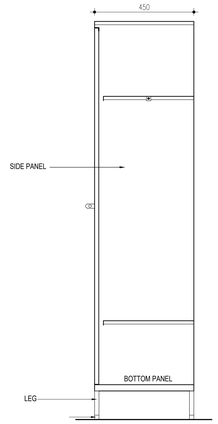

CROSS SECTION
SCALE : 1:10

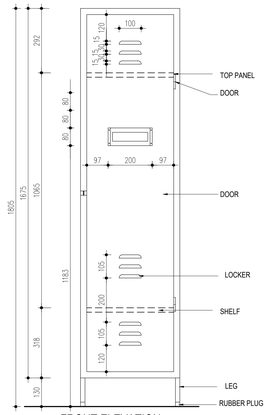

FRONT ELEVATION
SCALE : 1:10



PLAN
SCALE : 1:10



DOOR HEAD DETAIL
DETAIL 04.1
SCALE : 1:2

DOOR HEAD & JAMB DETAIL
DETAIL 04.2
SCALE : 1:2



LEG & SIDE PANEL FIXING DETAIL
DETAIL 04.5
SCALE : 1:1



SIDE & BACK PANEL FIXING DETAIL
DETAIL 04.4
SCALE : 1:1

NOTES

1. Do not scale drawing - only dimensions shown to be used.
2. The contractor shall verify all conditions, dimensions and levels on the site and notify the NEC supervisor of any variations before construction.
3. All levels are in meters to mean sea level.

REFERENCE DRAWINGS

DRAWING NO.	REFERENCE
XDN.E.0037-100-A-LA-0001-01-0A	DEMOLITION LAYOUT
XDN.E.0037-100-A-GA-0001-01-0A	RECEPTION GA PLAN, ELEVATIONS & SEC
XDN.E.0037-100-A-LA-0002-01-0A	RECEPTION FINISHES
XDN.E.0037-100-A-LA-0003-01-0A	ABLUTION PLAN, ELEVATIONS & SECTIONS
XDN.E.0037-100-A-LA-0004-01-0A	ENTRANCE RAMPS
XDN.E.0037-100-A-LA-0005-01-0A	KITCHEN LAYOUT PLAN
XDN.E.0037-100-A-LA-0006-01-0A	GROUND FLOOR LAYOUT PLAN
XDN.E.0037-100-A-SC-0001-01-0A	RECEPTION SCHEDULES & DETAILS
XDN.E.0037-100-A-DE-0001-01-0A	STAIR DETAILS

FOR TENDER

NO.	DESCRIPTION	BY	CHKD	APPD	DATE
0A	ISSUED FOR TENDER				

REVISIONS

This Document including all design and information therein is Confidential Intellectual Property of Transnet Copyright and all other rights are reserved by Transnet. This Document may only be used for its intended purpose.

KEY PLAN
1:1250

CONTRACTOR / CONSULTANT

TITLE	NAME	SIGN	DATE
DRAWN	-		- - -
CHECKED	-		
DESIGNED	-		- - -
CHECKED	-		

PR.ENG. / PR.TECH./PR. ARCH

NAME	DATE
SIGNATURE	- - -
REG. NUMBER	
TITLE	

TRANSNET NATIONAL PORTS AUTHORITY

TITLE	NAME	SIGN	DATE
DRAWN	ZZ		
CHECKED	AN		
DESIGNED			
CHECKED			

PR.ENG. / PR.TECH./PR. ARCH

NAME	MR. N. NAGAN	DATE
SIGNATURE		
REG. NUMBER		
SCALE		

TRANSNET

Transnet National Ports Authority

TRANSNET SOC Ltd : REG No. 1990/000900/30
(237 MAHATMA GANDHI RD, POINT, 4001)
(DURBAN) TEL: 031 361 1791

PROJECT / AREA / ASSET / SUBJECT/DRAWING TITLE

PORT OF DURBAN

REFURBISHMENT TO QUEENS WAREHOUSE GROUND FLOOR
ABLUTION SCHEDULES & DETAILS

PAPER SIZE	TRANSNET DRW. NO.	REV.
A0	XDN.E.0037-1-100-A-SC-0002-01	0A
	PROJECT DRG. NO.	REV.