



SK 03 TYPICAL SEWER MANHOLE

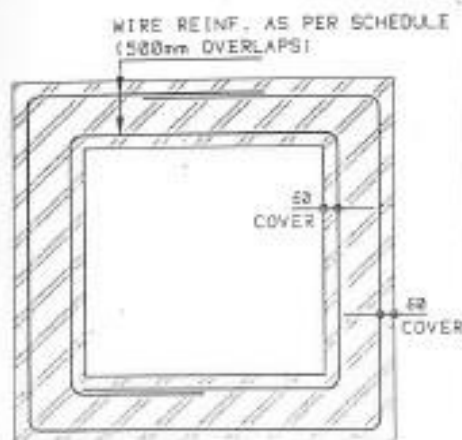


SECT. PLAN SHOWING  
REINFORCEMENT IN SHAFT

CHAMBER SCHEDULE		
DEPTH + COVER TO MH INVERT	BRICKWORK THICKNESS	BASE SLAB THICKNESS
m	mm	mm
2.5 TO 5.0	300	200
5.0 TO 10.0	350	300

SHAFT SCHEDULE			
SHAFT DEPTH	BRICKWORK THICKNESS	REINFORCING STEEL AT EACH COURSE	
m	mm	No.	mm <sup>2</sup>
UP TO 2.5	200	2	5.5
2.5 TO 5.0	300	2	5.6
OVER 5.0	350	2	5.3

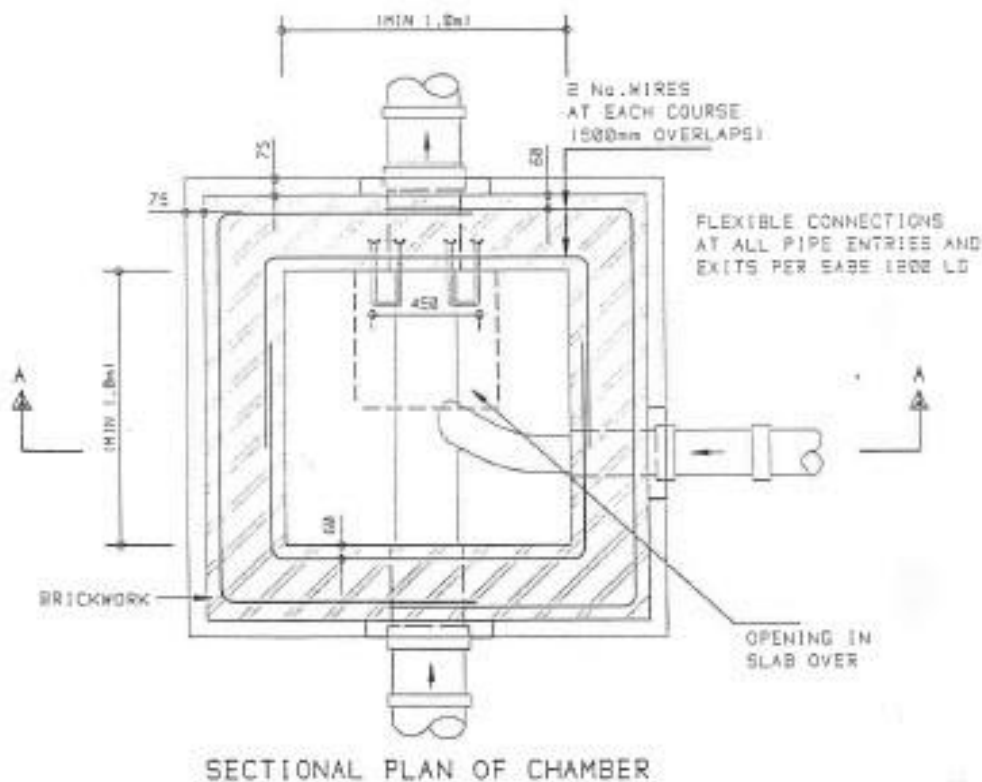

SECTIONAL PLAN OF CHAMBER

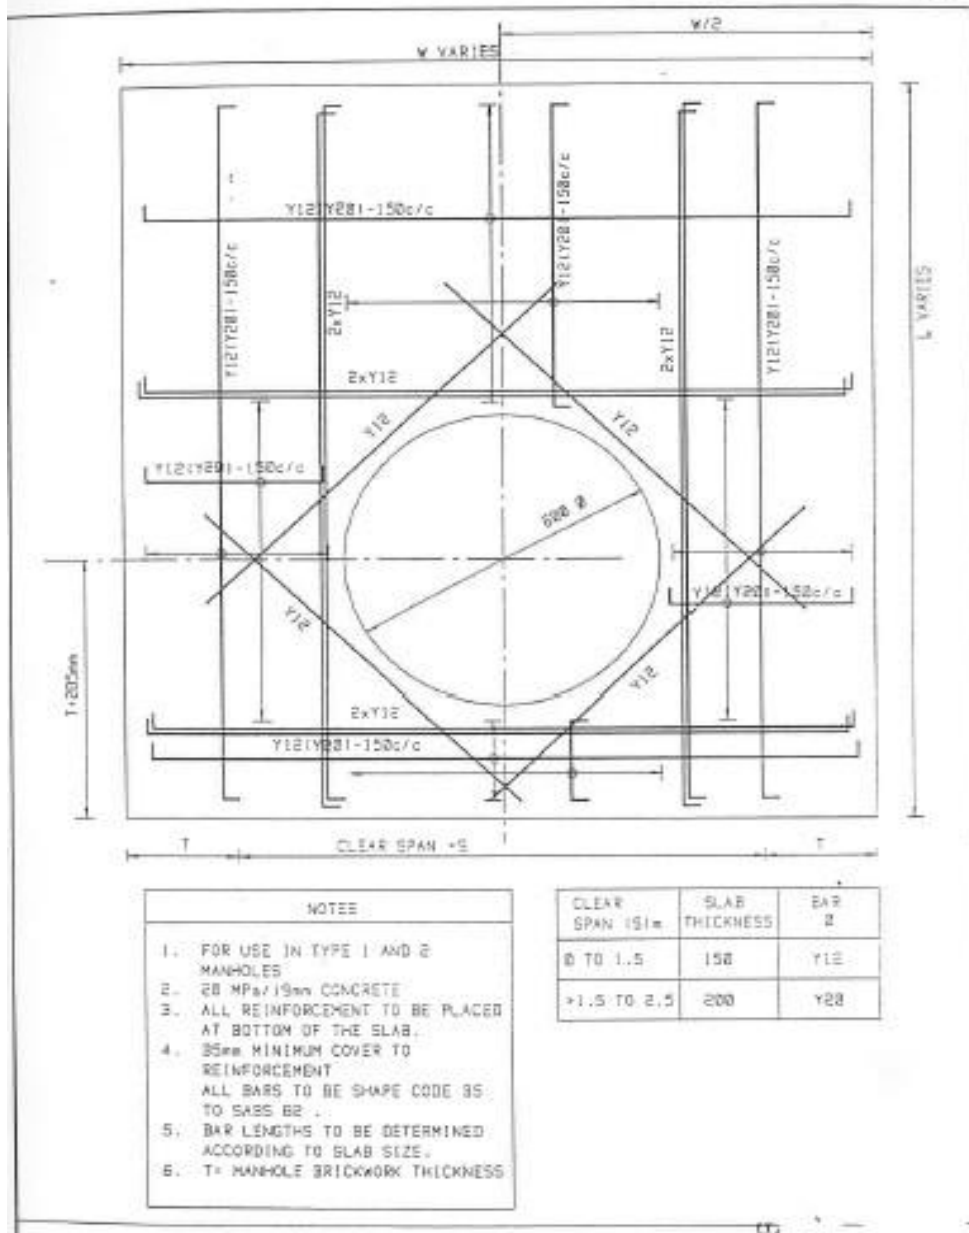

**SK 05 TYPICAL CONCRETE SLAB  
REINFORCEMENT**